

ARDEX K 10™

Reactivatable™, High-Flow, Self-Leveling Underlayment

Choose Reactivatable™ - Seeks its own level and provides a durable, flat, smooth floor surface with minimum labor. When installed using a spiked roller, ARDEX K 10 has a healing time of up to 25 minutes.
Install over: interior concrete, terrazzo, ceramic and quarry tile, epoxy coating systems and non-water soluble adhesive residue on concrete. Can be installed over concrete treated with certain curing compounds.

Key Features

- A blend of Portland cement and other hydraulic cements
- Reactivatable™
- Pour using the ROVER® Rolling Barrel Cart
- Pump using the AMP® Automatic Mixing Pump
- Mixes with water
- Interior use only - on, above or below grade

Installation


- **Package:** 50 lb. (22.7 kg) bag
- **Coverage:**
 - 50 ft² per bag at 1/8" (4.65 m² at 3 mm)
- **General Priming Recommendations**
 - Absorbent concrete: ARDEX P 51™ Primer
 - Non-porous substrates: ARDEX P 82™ Ultra Prime
- **Thickness:**
 - Levels at 1/8" (3 mm)
 - Installs from 1/16" to 1/2" (1.5 mm to 12 mm)
 - Can be tapered
- **Flow time:** Up to 25 minutes
- **Walk on:** 2 to 3 hours
- **Install:**
 - Moisture-insensitive tile and stone after 6 hours
 - Most other floor coverings after 24 hours

Performance

- **Compressive Strength (ASTM C109/mod - Air cure only):** 4,700 psi (329 kg/cm²) at 28 days
- **Flexural Strength (ASTM C348):** 1,000 psi (70 kg/cm²) at 28 days
- **VOC:** 0



SystemOne

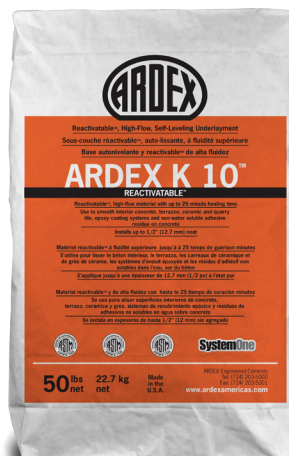

AF425 10/15

SUBSTRATE
PREPARATION

CHOOSE
YOUR
SOLUTION



AMERICAS

888-512-7339

+1-724-203-5000

www.ardexamericas.com

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at www.ardexamericas.com or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.