

ARDEX K 301™

Exterior Self-Leveling Topping

ARDEX K 301™ is a self-leveling Portland cement-based topping and underlayment for fast-track resurfacing and smoothing concrete. ARDEX K 301 can be sealed to create a concrete wear surface.

Install over: concrete, porous tile and certain non-porous surfaces on, above or below grade

Key Features


- Interior or Exterior
- Topping and underlayment
- Suitable for use in wet areas
- Suitable for use under the ARDEX MC™ Moisture Control Systems
- Pourable and pumpable
- Mixes with water only

Installation

- **General priming recommendations:**
EP 2000™ with sand broadcast
- **Packaging:** 50 lb (22.7 kg)
- **Coverage:** 23 sq. ft. per bag at 1/4" (2.1 m² at 6 mm)
- **Thickness:**
 - Neat: 1/4" to 3/4" (6 mm to 19.6 mm)
 - Aggregate: up to 2" (5 cm)
- **Flow time:** 10 minutes
- **Walkable:** 2 to 3 hours
- **Waterborne sealer:** 24 hours

Performance

- **ASTM C109 mod (air cure only) Compressive Strength:**
4,300 psi (301 kg/cm²) at 28 days
- **ASTM C348 Flexural Strength:** 1,000 psi
(70 kg/cm²) at 28 days
- **VOC:** 0

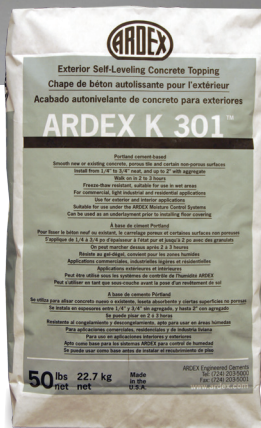

ENGINEERED CONCRETE
REPAIR SYSTEMS



AMERICAS

+1-724-203-5000
888-512-7339

www.ardexamericas.com