

ARDEX V 1200™

Self-Leveling Underlayment

Choose The Workhorse™ - ARDEX V 1200™ is the trusted leveler for big jobs on tight schedules.
Install over: interior concrete, terrazzo, ceramic and quarry tile, epoxy coating systems and non-water soluble adhesive residues on concrete

Key Features



- Pourable with the ROVER® Rolling Barrel Cart;
Pumpable with the AMP® Automatic Mixing Pumps
- Interior use
- Use on, above or below grade
- Mixes with water

Installation

- **General priming recommendations:**
 - Concrete: ARDEX P 51™ Primer
 - Most non-porous substrates, epoxy coatings, adhesive residue: ARDEX P 82™ Ultra Prime
- **Packaging:** 50 lb. (22.7 kg)
- **Coverage:** 25 sq. ft. per bag at 1/4" (2.3 m² at 6 mm)
- **Thickness:**
 - Levels at 1/4" (6 mm)
 - Installs from 1/8" to 1 1/4" (3 mm to 3 cm)
 - Can be tapered
- **Flow time:** 10 minutes
- **Walkable:** 2 to 3 hours
- **Install floor coverings:**
 - For installations up to 3/8" (0.95 cm):
 - Moisture-insensitive tile (ceramic, quarry, porcelain): 6 hours
 - Porous-backed carpet: 12 hours
 - Non-porous backed carpet, vinyl sheet/tile/plank, rubber, linoleum: 24 hours
 - For installations more than 3/8" (0.95 cm):
 - Moisture-insensitive tile (ceramic, quarry, porcelain): 6 hours
 - Porous-backed carpet: Mat test
 - Non-porous backed carpet, vinyl sheet/tile/plank, rubber, linoleum: Mat test
 - All other coverings: Mat test

Performance

- **ASTM C191 Initial Set:** Approx. 30 minutes
- **ASTM C191 Final Set:** Approx. 90 minutes
- **ASTM C109 mod (air cure only) Compressive Strength:** 4500 psi (315 kg/cm²) at 28 days
- **ASTM C348 Flexural Strength:** 1000 psi (70 kg/cm²) at 28 days
- **VOC:** 0

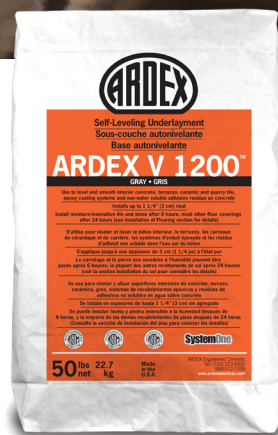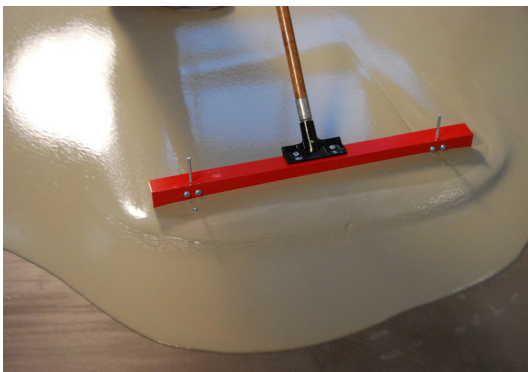

SystemOne

AF157 03/15

SUBSTRATE
PREPARATION

CHOOSE
YOUR
SOLUTION



AMERICAS

888-512-7339

+1-724-203-5000

www.ardexamericas.com

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or Google play.



Refer to the technical data sheet at www.ardexamericas.com or call 888-512-7339 prior to installation. For free ARDEX product training, click on ARDEX Academy.

© 2014 ARDEX Engineered Cements, L.P. All rights reserved.