serenbe with HDC Technology

NovaFloor® Serenbe™ is a Luxury Vinyl Flooring collection made by Novalis Innovative Flooring

With worldwide sales offices and distribution partners, Novalis is a leader in the design and manufacturing of innovative and sustainable luxury vinyl flooring. Established in 1984, Novalis has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

Serenbe[™] is a trademark of Novalis Innovative Flooring © 2018 Novalis Innovative Flooring

For more information about Serenbe™ visit NovaFloor.us or call 704-799-1111







with **HDC** Technology



Serenbe[™] flooring is a natural beauty, inspired by a lifestyle that's close to nature, yet with a sense of refinement and urban sophistication.

Serenbe[™] is ingenious LVT technology with the industry's best protection against scratches and scuffs and a High Density Core that's rigid, waterproof and amazing. Plus our attached foam underlayment is an effective sound barrier and comfort enhancer.

Serenbe[™] is where LVT is growing. And it was created just for you.

serenbe. with HDC Technology

7" x 48" Planks

Available as groutable glue down or with NovaClic® Fd (Fold Down) locking system and **HDC** Technology (7" x 47.75")







Serenbe™ HDC is a rigid LVT that resists dents and hides most subfloor imperfections.

V4 = Appearance varies most from piece to piece.



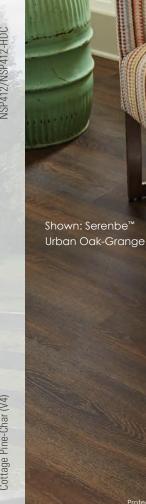

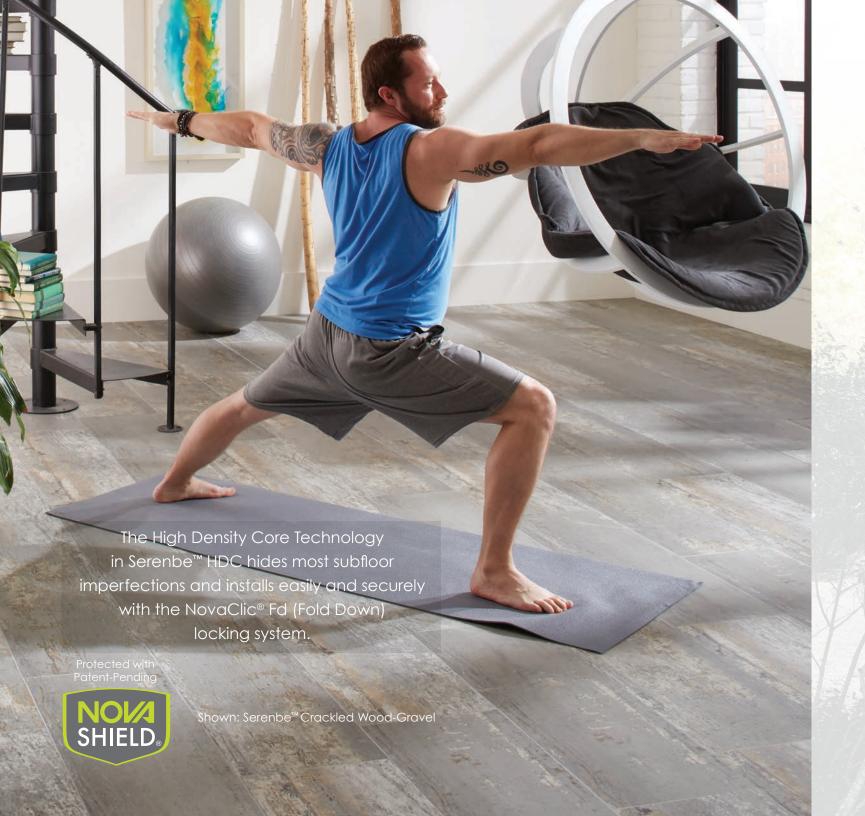

12" x 36" Tiles

Crackled Wood-Billow (V4)

Available as groutable glue down or with NovaClic® Fd (Fold Down) locking system and **HDC** Technology (11.75" x 35.75")











Lifetime Residential Warranty | 10-Year Light Commercial Warranty | NovaClic® Fd | NovaShield® | FloorScore® and GREENGUARD Gold Certified

The Novalis Appearance Variability Rating System: V1 = Appearance varies least from piece to piece. V4 = Appearance varies most from piece to piece.

NST442/ NST442-HDC

serenbe

Available as groutable glue down or with NovaClic® Fd (Fold Down) locking system and **HDC** Technology (11.75" x 23.75")

LIGHT

10 YEAR

with HDC Technology

12" x 24" Tiles







Stenciled Concrete-Lace (V3) NST432/ NST432-HDC







Stenciled Concrete-Bordeaux(V3) NST435/ NST435-HDC

Serenbe™ HDC is made with with High Density Core Technology that's waterproof, making it ideal for bath and kitchen installations.



own: Serenbe™ Carrara Marble-







Enhanced Protection

Exclusively by

NOVALIS INNOVATIVE FLOORING

We created NovaShield® to be the ultimate protection for your Serenbe™ and Serenbe™ HDC luxury vinyl flooring, and it is. That makes it ideal for the rough and tumble of kids, pets and life.

Plus, with built-in anti-microbial protection, you'll feel good about it, too!













THE BEST IN LVT PROTECTION

| Specifications | Glue Down | HDC-Clic |
|---------------------------------|------------------------|---------------------|
| Overall Thickness | 2.5 | 5.5 |
| Wearlayer Thickness | 0.3mm (12 mil) | 0.3mm (12 mil) |
| Tile Size | 12" x 24" | 12" x 24" |
| Tile Size | 12" x 36" | 12" x 36" |
| Plank Size | 7" x 48" | 7" x 48" |
| Urethane | Υ | Υ |
| Edge and Grout Effect | MBV | MBV |
| Floor Score | Yes | Yes |
| Residential Warranty | Lifetime Limited | Lifetime Limited |
| Light Commercial Warranty | 10-Year | 10-Year |
| Tile Packaging (12" x 24") | 18 pcs. (36 sq. ft.) | 12 pcs. (23.25. ft. |
| Tile Packaging (12" x 36") | 12 pcs. (36 sq. ft.) | 8 pcs. (23.3 sq. ft |
| Plank Packaging | 16 pcs. (37.3 sq. ft.) | 8 pcs. (18.56 sq. f |
| Tile Cartons/Pallet (12" x 24") | 48 | 42 |
| Tile Cartons/Pallet (12" x 36") | 51 | 42 |
| Plank Cartons/Pallet | 50 | 50 |
| Tile Weight/Carton (12" x 24") | 34.7 | 43.67 |
| Tile Weight/Carton (6" x 24") | 34.7 | 43.82 |
| Plank Weight/Cartons | 35.9 | 30.05 |
| | | |

| Technical Specifications | G | lue Down | H | IDC-Clic |
|--|--------|----------------------|---------|--------------------|
| ASTM F1700-13 Solid Vinyl Floor Tile | Clá | ass III, Type B | Cla | ss III, Type B |
| ASTM F137-08 Flexibility | | Passes | | Passes |
| ASTM F386-11 Thickness | | Passes | | Passes |
| ASTM F410- Wear Layer Thickness | | Passes | | Passes |
| ASTM F925 Stain and Chemical resistance (5 minute & 24 hou | ur) | Passes | | Passes |
| ASTM F1514 Heat Stability | | Passes | | Passes |
| ASTM F1515 Light Stability | | Passes | | Passes |
| ASTM F1914 Immediate & Residual Indentation | | Passes | | Passes |
| ASTM 2055 Size and Squareness | | Passes | | Passes |
| ASTM F2199-09 Dimensional Stability | | Passes | | Passes |
| ASTM D2047 Static COF for Polished Surfaces | Exceed | s Industry Standards | Exceeds | Industry Standards |
| ASTM E648-06 Critical Radient Flux | | Class 1 | | Class 1 |
| ASTM E662 Smoke Density | | Passes | | Passes |
| ASTM F970-07 Static load limit | 0.00 | 01" @ 250 lbs. | 0.00 | 1" @ 250 lbs. |
| Static Load Limit (modified) | | >1,200 lbs. | > | 1,200 lbs. |
| | | | | |

SERENBE™ IS MADE TO THE HIGHEST ENVIRONMENTAL STANDARDS BY NOVALIS INNOVATIVE FLOORING


























Information in this catalog is subject to change without notice. Color accuracy may vary due to printing. © Novalis 2018